

DATA SHEET

DESONO™

C-IC6

TWO-WAY 6.5-INCH CEILING MOUNT CONFERENCE LOUDSPEAKER



FEATURES

- Zoom and Microsoft Teams certified
- Low profile, less than 151 mm (6") total depth
- Bridge-mounted soft dome tweeter mechanically isolated from the low frequency driver
- Supports both standard category cables and traditional speaker wiring for audio connections
- Directly integrates with Tesira® AMP-450BP (PoE+ amplifier)
- ETL listed to conform with UL Std 1480A and UL 2043; Certified to CSA C22.2#62368-1



APPLICATIONS

DISTRIBUTED
Conference Rooms · Board Rooms

DESCRIPTION

Desono™ C-IC6 is a low-profile, two-way passive coaxial loudspeaker optimized for speech reproduction in conferencing applications.

Designed with the installer in mind, the C-IC6 loudspeaker supports audio connections via either standard category cable or traditional speaker cable. They can be blind-mounted from below the ceiling, and feature a magnetic grille for easy toolless installation and removal. The grille plates are available in white, black, or red, or can be painted to match the room decor.

The C-IC6 also directly integrates with the Tesira AMP-450BP—a four-channel “backpack” PoE+ amplifier—which reduces wiring requirements and installation time.

Desono C-IC6 loudspeakers are an ideal choice for any conferencing space that demands superior speech reproduction.

TECHNICAL SPECIFICATIONS

| | | |
|---|--|----------------------|
| Operating Mode | Passive with DSP | |
| Operating Environment | Indoor in climate-controlled environments | |
| Operating Range (-10dB) | 60 Hz to 20 kHz | |
| Nominal Beamwidth (H x V) | 130°, conical | |
| Transducers | LF 1 x 6.5" (165 mm) treated paper cone HF 1 x 1" (25 mm) soft dome | |
| Continuous Power Handling @ Nominal Impedance | 22V | 60W @ 8Ω (240W peak) |
| Nominal Sensitivity @ 1m | @ 1W 88 dB | @ 2.83V 88 dB |
| Nominal Maximum SPL @ 1m | Peak 112 dB | Continuous 106 dB |
| Recommended Amplifiers | 60W - 120W @ 8Ω (22V - 31V); Tesira AMP-450BP | |

PHYSICAL

| | |
|------------------------|---|
| Input Connection | One 4-pole Euroblock connector for two pair of parallel connections [up to 16AWG]; Two RJ-45 connectors |
| Mounting Provisions | 4 mounting clamps with 36 mm (1.4") grip range |
| Compliance | ETL listed to comply with UL 1480A and UL 2043; Certified to CSA C22.2#62368-1; Suitable for use in air handling spaces per NFPA 70, NFPA 90 Conforms with City of Chicago Codes |
| Dimensions H x Dia. | 151 mm x 276 mm (5.9" x 10.9") |
| Cutout Diameter | 248 mm (9.75") |
| Weight | 3.5 kg (7.8 lbs) |
| Finish | Refer to the Technical Drawings (page 3) |
| Accessories (included) | C Ring; Tile Bridge; Paintable Metal Grille |

OPTIONS

| | |
|-------------|--|
| Accessories | BPAK backpack adapter kit; C-IC6-GK-12PK grille kits (black, white, or red) |
|-------------|--|


Biamp strives to improve its products on a continual basis. Specifications are therefore subject to change without notice.

Data presented on this spec sheet represents the basic performance specifications for the model. For a detailed analysis of this loudspeaker's performance, please download the GLL file from our website: biamp.com


DESONO™ C-IC6

TWO-WAY 6.5-INCH
CEILING MOUNT CONFERENCEING LOUDSPEAKER


FREQUENCY RESPONSE

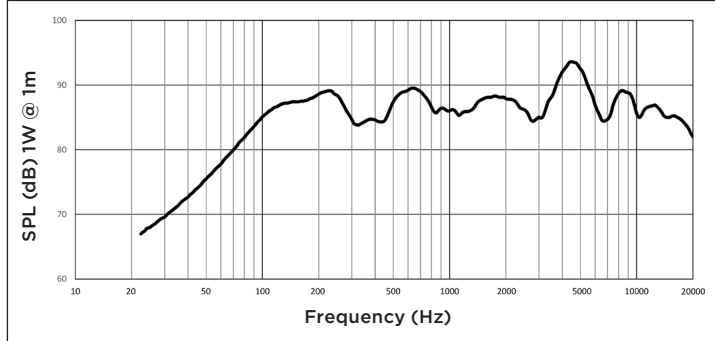


HORIZONTAL BEAMWIDTH

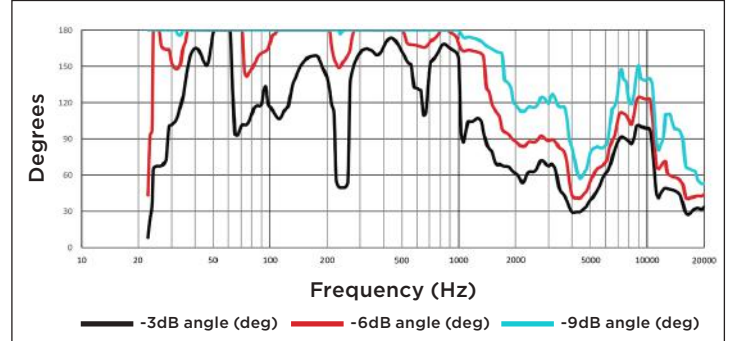









IMPEDANCE / PHASE

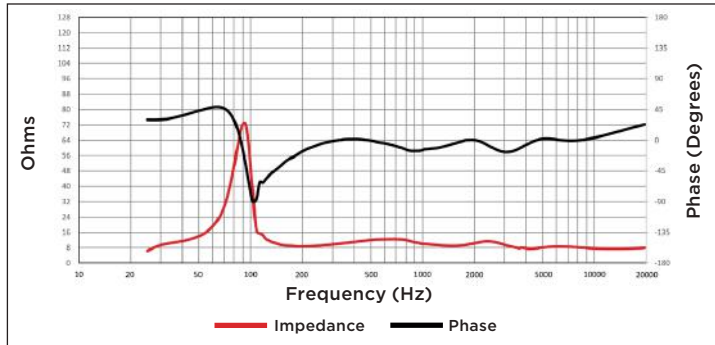

VERTICAL BEAMWIDTH

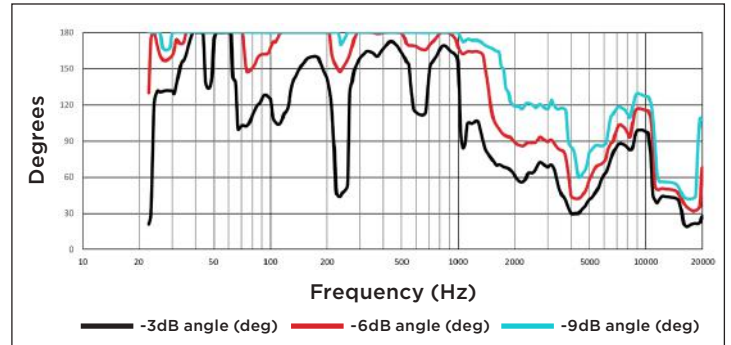

POLAR PLOTS



DESONO™ C-IC6

TWO-WAY 6.5-INCH CEILING MOUNT CONFERENCE LOUDSPEAKER

ARCHITECTS & ENGINEERS SPECIFICATIONS

The loudspeaker shall be a two-way, passive coaxial design intended for in-ceiling mounting. The loudspeaker shall be equipped with a 6.5-inch (165 mm) treated paper low frequency transducer (“woofer”), a 1-inch (25 mm) soft dome high frequency transducer (“tweeter”), and a passive crossover/protection circuit network. The high frequency transducer shall be physically separate from the low frequency transducer and shall be bridge-mounted above the low frequency transducer. The loudspeaker shall have a ported architecture and a nominal impedance of 8 ohms. The loudspeaker shall have a coverage angle of 130° from 1kHz to 6kHz. The loudspeaker enclosure shall be constructed of formed steel and UL94V-0 fire rated plastic. The loudspeaker shall include a terminal box that shall interface with conduit having an inside diameter of either 13 mm (0.5 inches) or 22 mm (0.875 inches). The loudspeaker shall be equipped with a four-position, 5.08 mm (0.2 inches) pluggable Euroblock connector and two RJ-45 connectors for audio signal connections. The loudspeaker shall be suitable for blind-mounting from below the ceiling and shall support a magnetically-attached grille. The loudspeaker shall have an attachment point for connection via chain or wire to building structure as a secondary support point. The loudspeaker shall include mounting points for direct attachment of a Tesira® AMP-450BP amplifier. The loudspeaker shall comply with the requirements of UL Standard 1480A and UL Standard 2043. The loudspeaker shall be UL listed, CE marked, and shall be compliant with the RoHS directive. Warranty shall be five years. The loudspeaker shall be Desono™ C-IC6.

TECHNICAL DRAWING / DIMENSIONS / FINISH

H x W (diameter)

151 mm x 276 mm (5.9" x 10.9")

Unit Weight

3.5 kg (7.8 lbs)

Shipping Weight (shipped in pairs)



10.9 kg (24 lbs)

Grille




Powder-coated perforated steel
Black, White, or Red

Enclosure / Finish

PC/ABS V-0 plastic
Matte finish, black

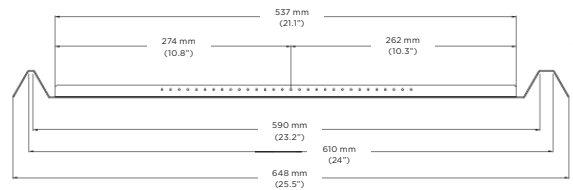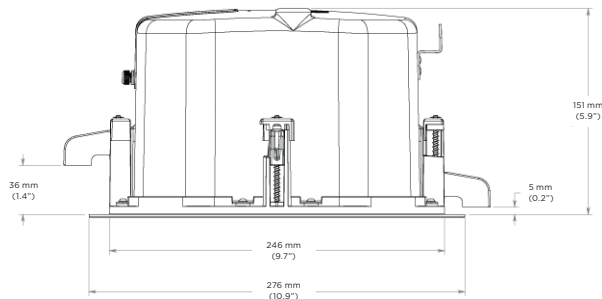

TILE BRIDGE RAILS

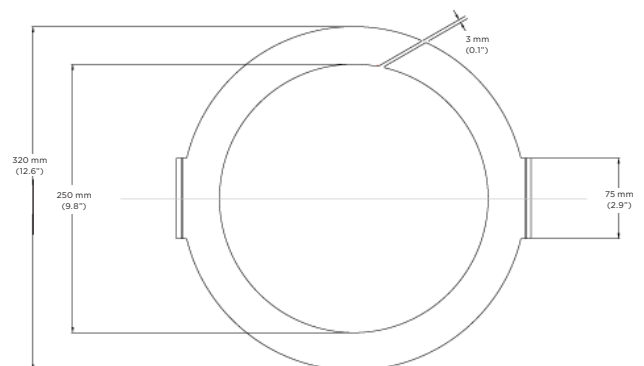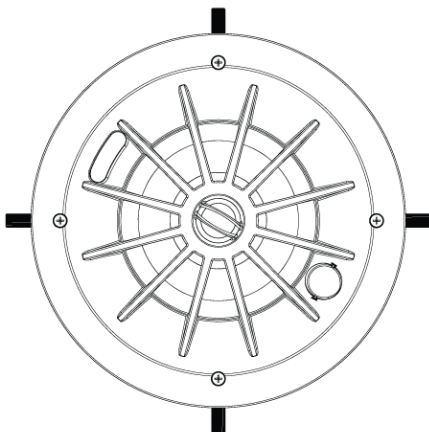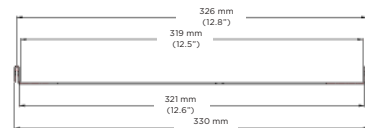

C RING