SlimPAR™ Pro H USB

FEATURES

- LED Par designed for any application in need of a high-power, hex-color (RGBAW+UV), low-profile wash light
- D-Fi USB compatibility for wireless Master/Slave or DMX control
- Compatible with most 7.5" Barndoors for added light control
- Generate a broad spectrum of colors and achieve natural-looking color temperatures with 6-in-1 LED technology
- Flicker-free operation suitable for on-camera use
- Easily control static colors and automated programs with the optional IRC-6 remote
- Ideal for quiet applications due to silent operation and no moving parts
- Increase standalone versatility with multiple userconfigurable settings
- Save time running cables and extension cords by power linking multiple units
- Fits best in the CHS-30 VIP Gear Bag
- Compact design easily fits inside sticks of TRUSST®



*Shown with the optional IRC-6 remote and D-Fi™ USB

Weight: 7.2 lb (3.3 kg)

Size: 10 x 3.9 x 11.4 in (253 x 98 x 290 mm)









SlimPAR Pro H USB

SlimPAR Pro H USB is designed for any application that calls for a high-power, lowprofile LED washlight with precise colors. Features include D-Fi USB compatibility for wireless control. SlimPAR Pro H USB has no moving parts and is flicker-free so it is ideal for quiet and on-camera applications. Generate a broad spectrum of colors and achieve natural-looking color temperatures with 6-in-1 LED technology. Fits best in the CHS-30 VIP Gear Bag.














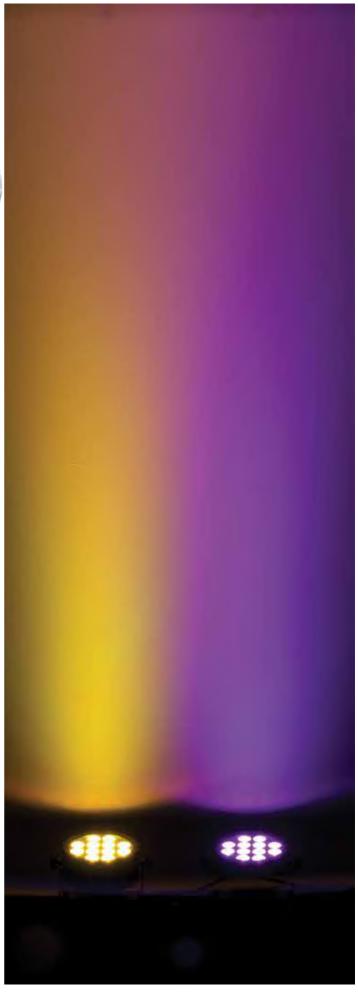





Highlights

- LED Par designed for any application in need of a high-power, hex-color (RGBAW+UV), low-profile wash light
- D-Fi USB compatibility for wireless Master/Slave or DMX control
- powerCON®-compatible power input/output connections for power linking
- Compatible with most 7.5" Barndoors for added light control
- Generate a broad spectrum of colors and achieve natural-looking color temperatures with 6-in-1 LED technology
- Flicker-free operation suitable for on-camera use
- Suitable for every event with either black or white housing
- Easily control static colors and automated programs with the optional IRC-6 remote
- Ideal for quiet applications due to silent operation and no moving parts
- Increase standalone versatility with multiple user-configurable settings
- Save time running cables and extension cords by power linking multiple units
- Fits best in the CHS-30 VIP Gear Bag
- Compact design easily fits inside sticks of TRUSST®

Specifications

- DMX Channels: 6, 7 or 12
- DMX Connectors: 3-pin XLR
- Light Source: 12 (hex-color RGBAW + UV) 10 W (2.4 A), 50,000 hours life expectancy
- Strobe Rate: 0 to 31 Hz • PWM Frequency: 1.2 kHz
- Beam Angle: 24° • Field Angle: 41°
- Illuminance: 3,218 lux @ 2 m, 483 lux @5 m
- Power Linking: 5 units @ 120 V; 10 units @ 230 V
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 99 W, 1.4 A @ 120 V, 60 Hz 96 W, 0.8 A @ 230 V, 50 Hz
- Weight: 7.2 lb (3.3 kg)
- Size: 10 x 3.9 x 11.4 in (253 x 98 x 290 mm)
- Approvals: CE, MET
- Optional Controllers: IRC-6, D-Fi USB

What's Included

- Power cord
- Gel Frame
- Gel Frame Holder
- Warranty card
- Quick Reference Guide