

Technical Manual

JBL4673A

SPECIFICATIONS



ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Power Capacity: Continuous Pink Noise: 600w
- Frequency Range: 40 Hz to 20 kHz (-10 dB)
- Sensitivity: 97 dB SPL*
- Crossover Frequencies: 500 Hz

SYSTEM COMPONENTS:

- Cabinet: C4507
- Grille: N/A
- Low Frequency Transducer: 380mm (15 in.) Cone Transducer (2226H)

*1 Watt (2.83 V RMS) @ 1 Meter

SYSTEM COMPONENTS: (cont'd)

- High Frequency Transducer: 100mm (4 in.) Pure Titanium Diaphragm (2445J)
- Crossover Network: 3115A


PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 546mm x 1054mm x 448mm D (41.5 x 21.5 x 17.62 in. D)
- Shipping Weight: 110 lbs. (49.8 kg.)


WARRANTY INFORMATION:

- Refer to the Warranty Statement packed with each product.

PACKAGE

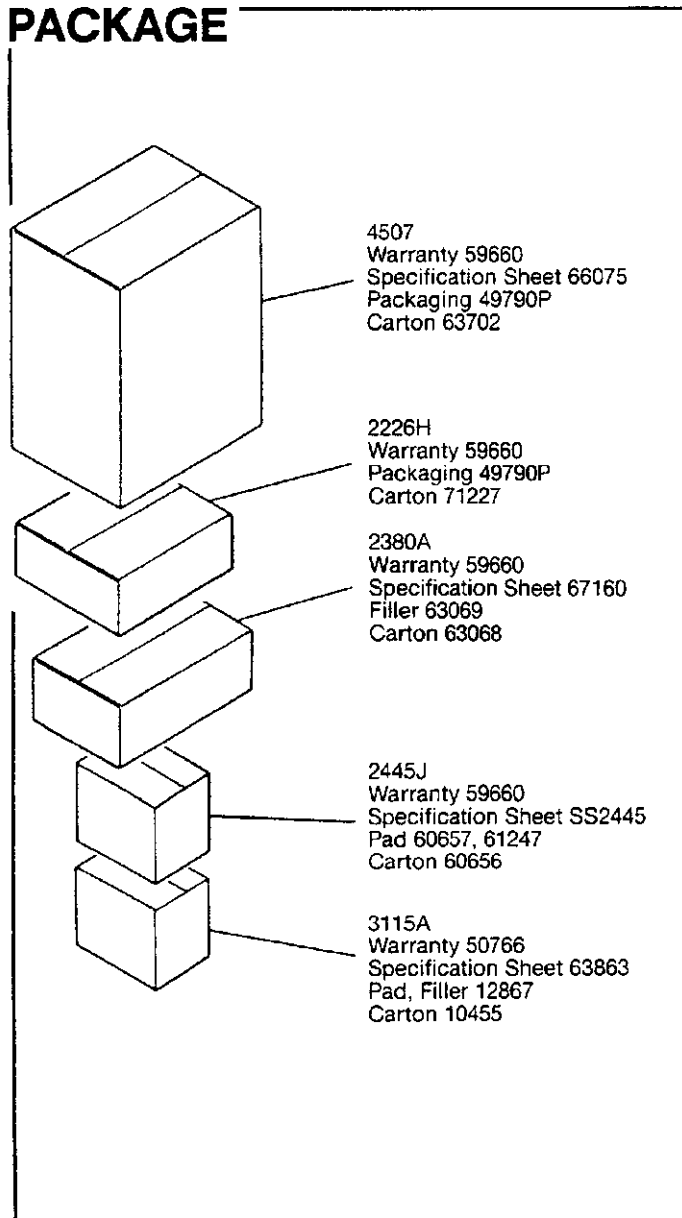

WIRING DIAGRAM

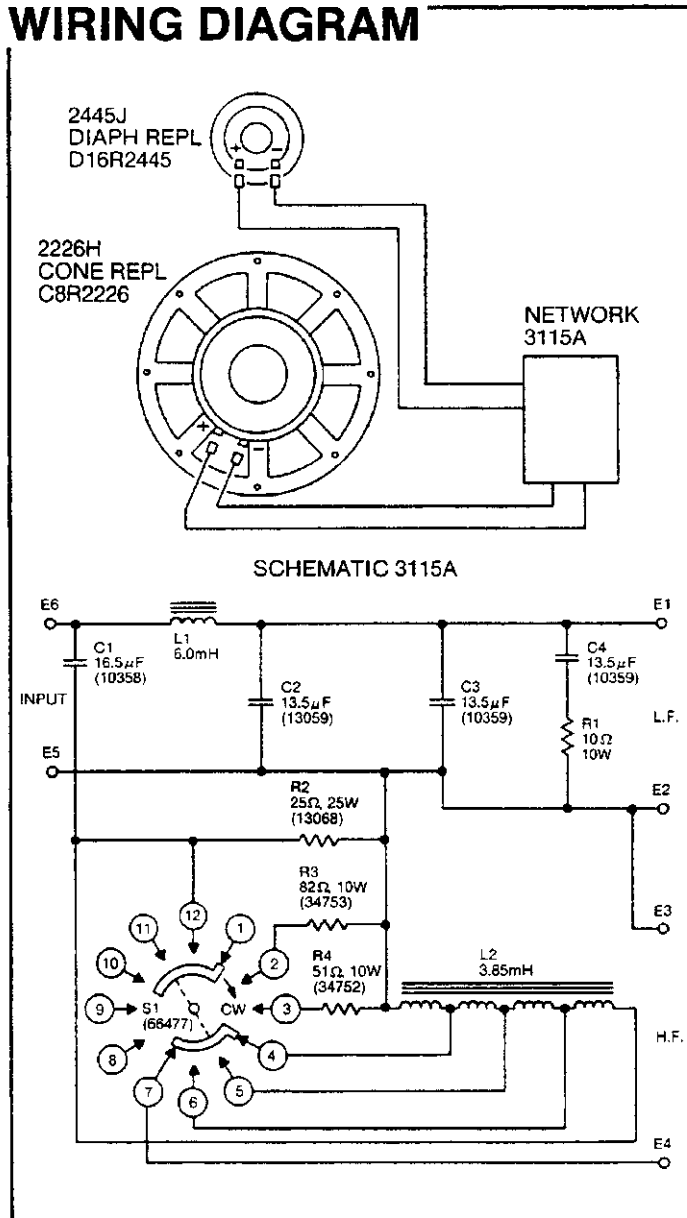

JBL4673A

COMPONENT EXPLODED VIEW

