

ACT-32H Handheld Transmitter

Key Features

- Robust, lightweight plastic housing.
- The unique multi-layered metal grille protects the capsule against impact, rolling and pop noise, ensuring clarity of sound.
- Interchangeable capsule module with premium condenser or dynamic options for easy and fast changeovers.
- Premium condenser capsules exhibit high fidelity, wide dynamic range, fast transient responses, good feedback rejection, accurate sound image characteristics, transparent sound quality and withstand maximum SPL.
- Reversible end-cap allows power on/off switch being locked to avoid accidental power-off during performance.
- Impact-resistant battery compartment holds 2 AA batteries.
- Backlit LCD displays various parameters and status.
- Stable PLL circuits. Automatically synchronized with the receiver's frequency by MIPRO's patented ACT™ function.
- Patented "built-in" antenna design.
- Interchangeable colored rings for microphone channel identification on stage.
- High-efficiency circuitry design provides more than 16 hours of operation from 2 AA batteries (depending on the battery quality).



Microphone Capsules


| | |
|--------------|------------------------------|
| MU-39 | Dynamic Capsule |
| MU-59 | Professional Dynamic Capsule |
| MU-70 | Condenser Capsule |
| MU-80 | Condenser Capsule |
| MU-90 | Condenser Capsule |

Accessories

| | |
|---------------|--|
| MS-20 | Desktop Microphone Tripod |
| MD-20 | Handheld Transmitter Microphone Holder |
| RH-77a | Multi-Colored Rings |
| SW-20 | Foam Windscreens |
| TC-18 | Transmitter Shielding Case |

Technical Specifications

| | |
|---------------------|--|
| Frequency Range | UHF 480 ~ 934 MHz |
| Bandwidth | 24 MHz |
| Oscillation Mode | PLL Synthesized |
| Channel Set-Up | ACT Sync |
| RF Output Power | 10mW ~ 30mW (According to local regulation) |
| Spurious Emissions | < -55 dBc |
| LCD Display | Group, Channel, Battery status & error codes |
| Max. SPL | 140 dB SPL |
| Battery Type | 2 AA alkaline |
| Operating Time | Min. 12 hours (Low Power) |
| Current Consumption | Approx. 92 mA |
| Dimensions (Ø × L) | 51 × 234 mm / 2 × 9.2 " |
| Net Weight | Approx. 251 g / 8.9 oz |

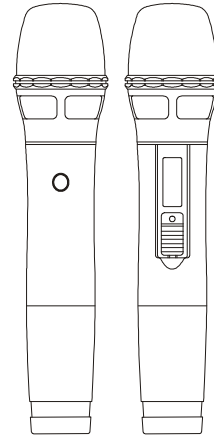

MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw