



MKE 2 Clip-On Microphone








The MKE 2 Gold is a high-quality, small clip-on microphone for every area of live sound transmission. It sets the highest benchmarks in sound quality and robustness under tough on-stage conditions. The ultra-lightweight Umbrella Diaphragm™ and the welded housing offer optimal protection against sweat.

FEATURES

- New Umbrella Diaphragm™ protects the mic against sweat
- Very high sound pressure handling capability
- Versatile attachment due to an extensive range of accessories

PRODUCT VARIANTS / DELIVERY INCLUDES

	Slip-on caps		Cover-up	Wind screen	Clip	Connector	Applicable to
	MZC 2-1	MZC 2-2					
MKE 2-4 Gold-C MKE 2-4-3 Gold-C	●	●	●			 3-Pin SE	SK 50/SK 250/SK 6000/ SK 9000/SK 2000/SK 5212
MKE 2-5 Gold-C MKE 2-5-3 Gold-C	●	●	●			 open end	
MKE 2-60 Gold-C	●	●	●				System K6
MKE 2-ew Gold MKE 2-ew-3 Gold	●	●	●	●	●	 3.5 mm	ew G3/ew G4/ew D1/ Speechline DW/XSW
MKE 2 P-C	●					 XLR-3	Video camera Mixing console


Variante	Farbe	Artikelnummer
MKE 2-4 Gold-C	black	Art. no. 004736
MKE 2-4-3 Gold-C	beige	Art. no. 004739
MKE 2-5 Gold-C	black	Art. no. 004735
MKE 2-5-3 Gold-C	beige	Art. no. 004739
MKE 2-60 Gold-C	black	Art. no. 004733
MKE 2-ew Gold	black	Art. no. 009831
MKE 2-ew-3 Gold	beige	Art. no. 009832
MKE 2 P-C	black	Art. no. 004224



MKE 2

Clip-On Microphone

FREQUENCY RESPONSE

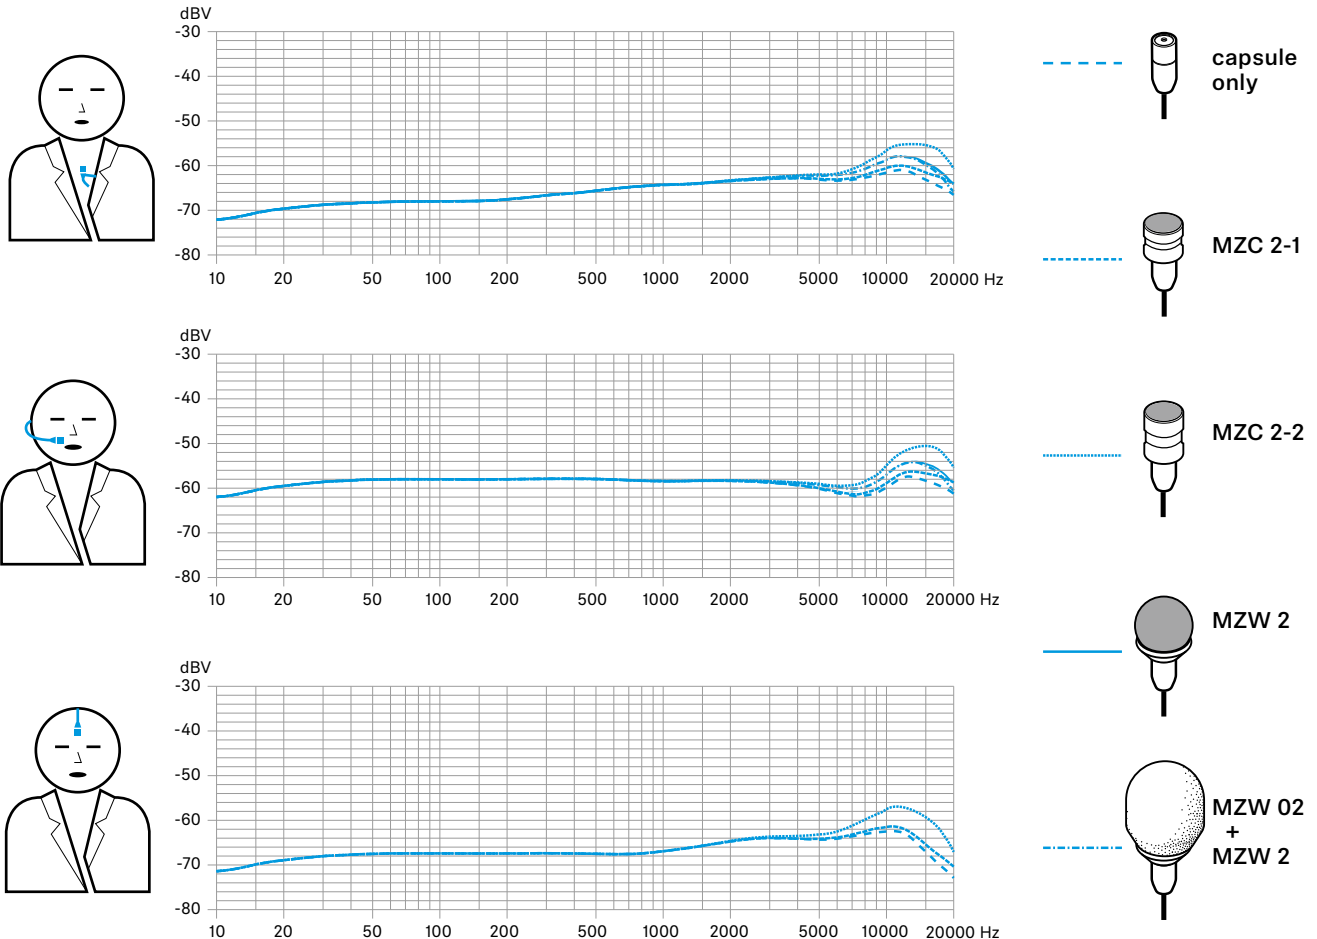

SPECIFICATIONS

Transducer principle	pre-polarized condensor microphone
Pick-up pattern	omni-directional
Sensitivity (free field, no load) (1 kHz)	5 mV/Pa, ± 3 dB
Max. SPL at 1 kHz	142 dB
Frequency response	20 to 20.000 Hz ± 3 dB
Equivalent noise level	
A-weighted	26 dB
CCIR-weighted	39 dB
Connector	see product variants
Cable length	approx. 1.60 m