

Product Specifications

Beta® 57A Supercardioid Dynamic Instrument Microphone

Overview

The Shure Beta 57A is a precision-engineered dynamic microphone designed for professional live sound reinforcement and studio recording. A tight supercardioid pattern delivers high gain before feedback and maximum isolation from other sound sources, with minimum off-axis tone coloration.

Features

- Premier live performance microphone with Shure quality, ruggedness, and reliability
- Uniform supercardioid pick-up pattern for maximum gain before feedback and superior rejection of off-axis sound
- Tailored frequency response specifically shaped for guitars, drums and vocals
- Neodymium magnet for greater sensitivity and higher output
- Advanced pneumatic shock mount system that minimizes transmission of mechanical noise and vibration
- Dent-resistant steel mesh grille and enamel coated die-cast metal construction resist wear and abuse

Available Models

Beta 57A	Supercardioid Dynamic Instrument Microphone with High-output Neodymium Element
-----------------	--

Specifications

Cartridge Type	Dynamic (moving coil)
Frequency Response	50 to 16,000 Hz
Polar Pattern	Supercardioid
Output Impedance	150 Ω
Sensitivity (at 1kHz, open circuit voltage)	-51 dBV/Pa (2.8 mV) 1 Pascal=94 dB SPL
Weight	Net: 0.275 kg (0.6 lbs)
Connector	Three-pin professional audio (XLR), male




Beta 57A


Accessories and Replacement Parts

RK320	Replacement grille	R174	Replacement cartridge
A57AWS	Locking microphone windscreen	A25D	Microphone clip

Polar Pattern

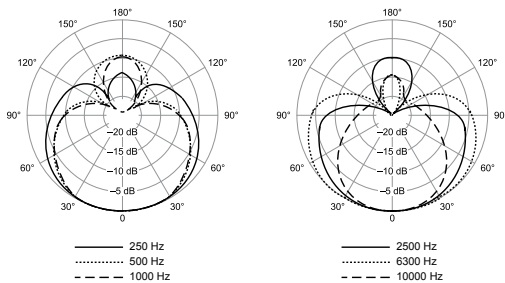

Frequency Response

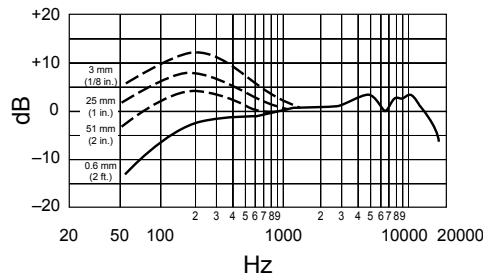

SHURE®

LEGENDARY
PERFORMANCE™

www.shure.com

©2015 Shure Incorporated