


CS-760B / CS-760W

2-Way Weatherproof Music Horn

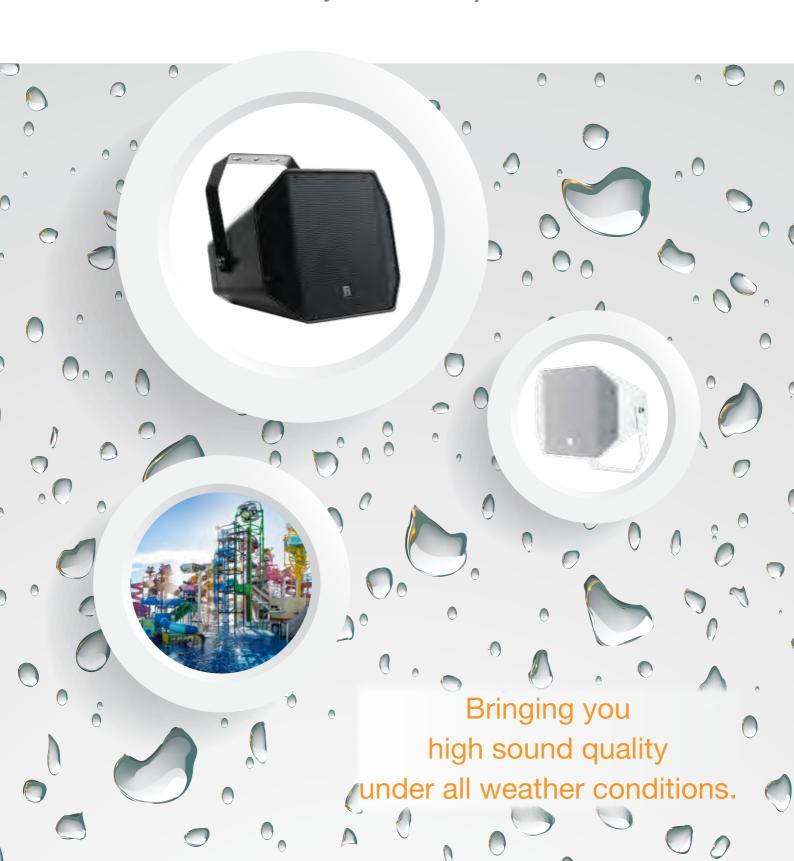

The horn speaker that fits all your need for excellent speech and BGM clarity in the open...

CS-760B / CS-760W

2-Way Weatherproof Music Horn

- Highly intelligible: suited to voice alarm, public address and BGM application by 2-way speaker system.
- > IP66 certified: All weather durability, be it water or dust. Ideal for any fully outdoor applications.
- Special paint coat prevents color degradation, ensuring long-lasting exterior condition.
- Rotary switch facilitates hassle-free impedance change.
- Various mounting brackets available as accessories allowing flexibility of mounting the speaker on a platform, in the ceiling, on the wall or on a pole.



EN S





Parking spaces

Railway stations





Amusement parks

Sports fields

SPECIFICATIONS

	CS-760B	CS-760W
Rated Input	60 W (high impedance)	
Rated Impedance	100V Line: 170 Ω (60 W), 330 Ω (30 W), 670 Ω (15 W), 1.3 kΩ (7.5 W) 70V Line: 83 Ω (60 W), 170 Ω (30 W), 330 Ω (15 W), 670 Ω (7.5 W)	
Sensitivity (1 W, 1 m)	100 dB	
Maximum SPL (60W, 1 m)	117 dB	
Frequency Response	100 - 20 kHz	
Crossover Frequency	2.5 kHz	
Directivity Angle	Horizontal: 90°; Vertical: 80°	
Speaker Component	Low Frequency: 16 cm (6") cone-type High Frequency: 2.5 cm (1") dome tweeter	
Dust/Water Protection	IP66	
Connection	Speaker cord (Hot: Black; Com: White)	
Finish	Enclosure: ABS, Black, Paint Coating Punched Net: Surface-treated Steel Plate, Black, Paint Coating Bracket: Stainless Steel, Black, Powder Coating	Enclosure: ABS, White, Paint Coating Punched Net: Surface-treated Steel Plate, White, Paint Coating Bracket: Stainless Steel, White, Powder Coating
Dimensions (W x H x D)	388 x 310 x 367 mm	
Weight	7.4kg	



