


Overview

The Yamaha MY8-AT is an optional digital I/O card for compatible Yamaha digital mixing consoles and signal processors. It provides eight inputs and eight outputs for 24-bit, 44.1/48 kHz uncompressed ADAT compliant digital audio.

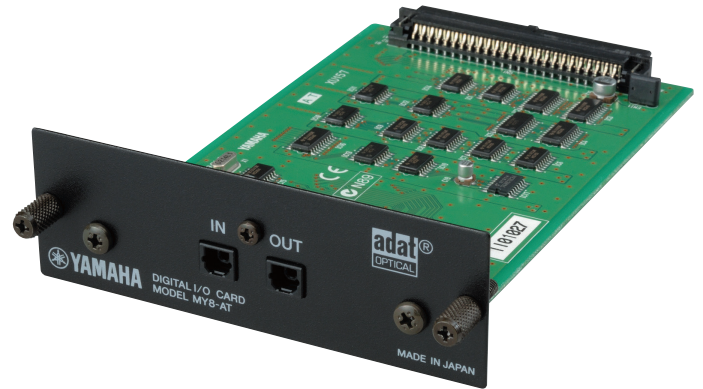

Features

- 24bit resolution, 8-in/8-out ADAT interface (4-in/4-out at 96kHz)
- 2 x Optical connectors
- Dimensions: 120mm x 40mm x 176mm (4.7" x 1.6" x 6.9")


Specifications

General Specifications

Channel Count	8IN/ 8OUT
Format	ADAT
Sampling Frequency	44.1/48kHz
Resolution	24bit
Connector	2 x TOS LINK connectors

Dimensions

Unit: mm (inch)

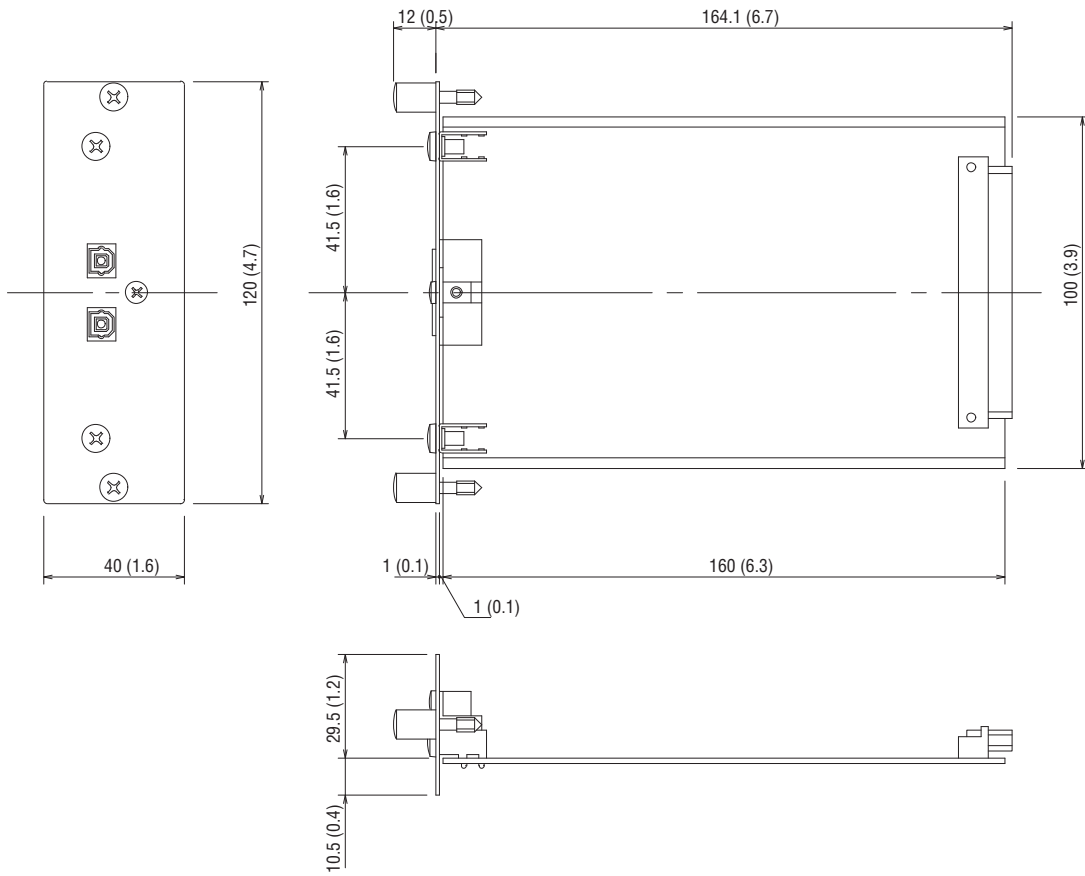

Architectural and Engineering Specifications

The Yamaha MY8-AT shall be an optional digital I/O card for compatible Yamaha digital mixing consoles and signal processors. It shall provide eight inputs and eight outputs for 24-bit, 44.1/48 kHz uncompressed ADAT compliant digital audio. Two TOSLINK connectors shall be provided for input and output connection. Dimensions shall be 120 (W) x 40 (H) x 176 (D) mm.

*All information subject to change without notice.

*All trademarks and registered trademarks are property of their respective owners.

Created in March, 2017

YAMAHA CORPORATION

P.O.BOX 1, Hamamatsu Japan

www.yamahaproaudio.com